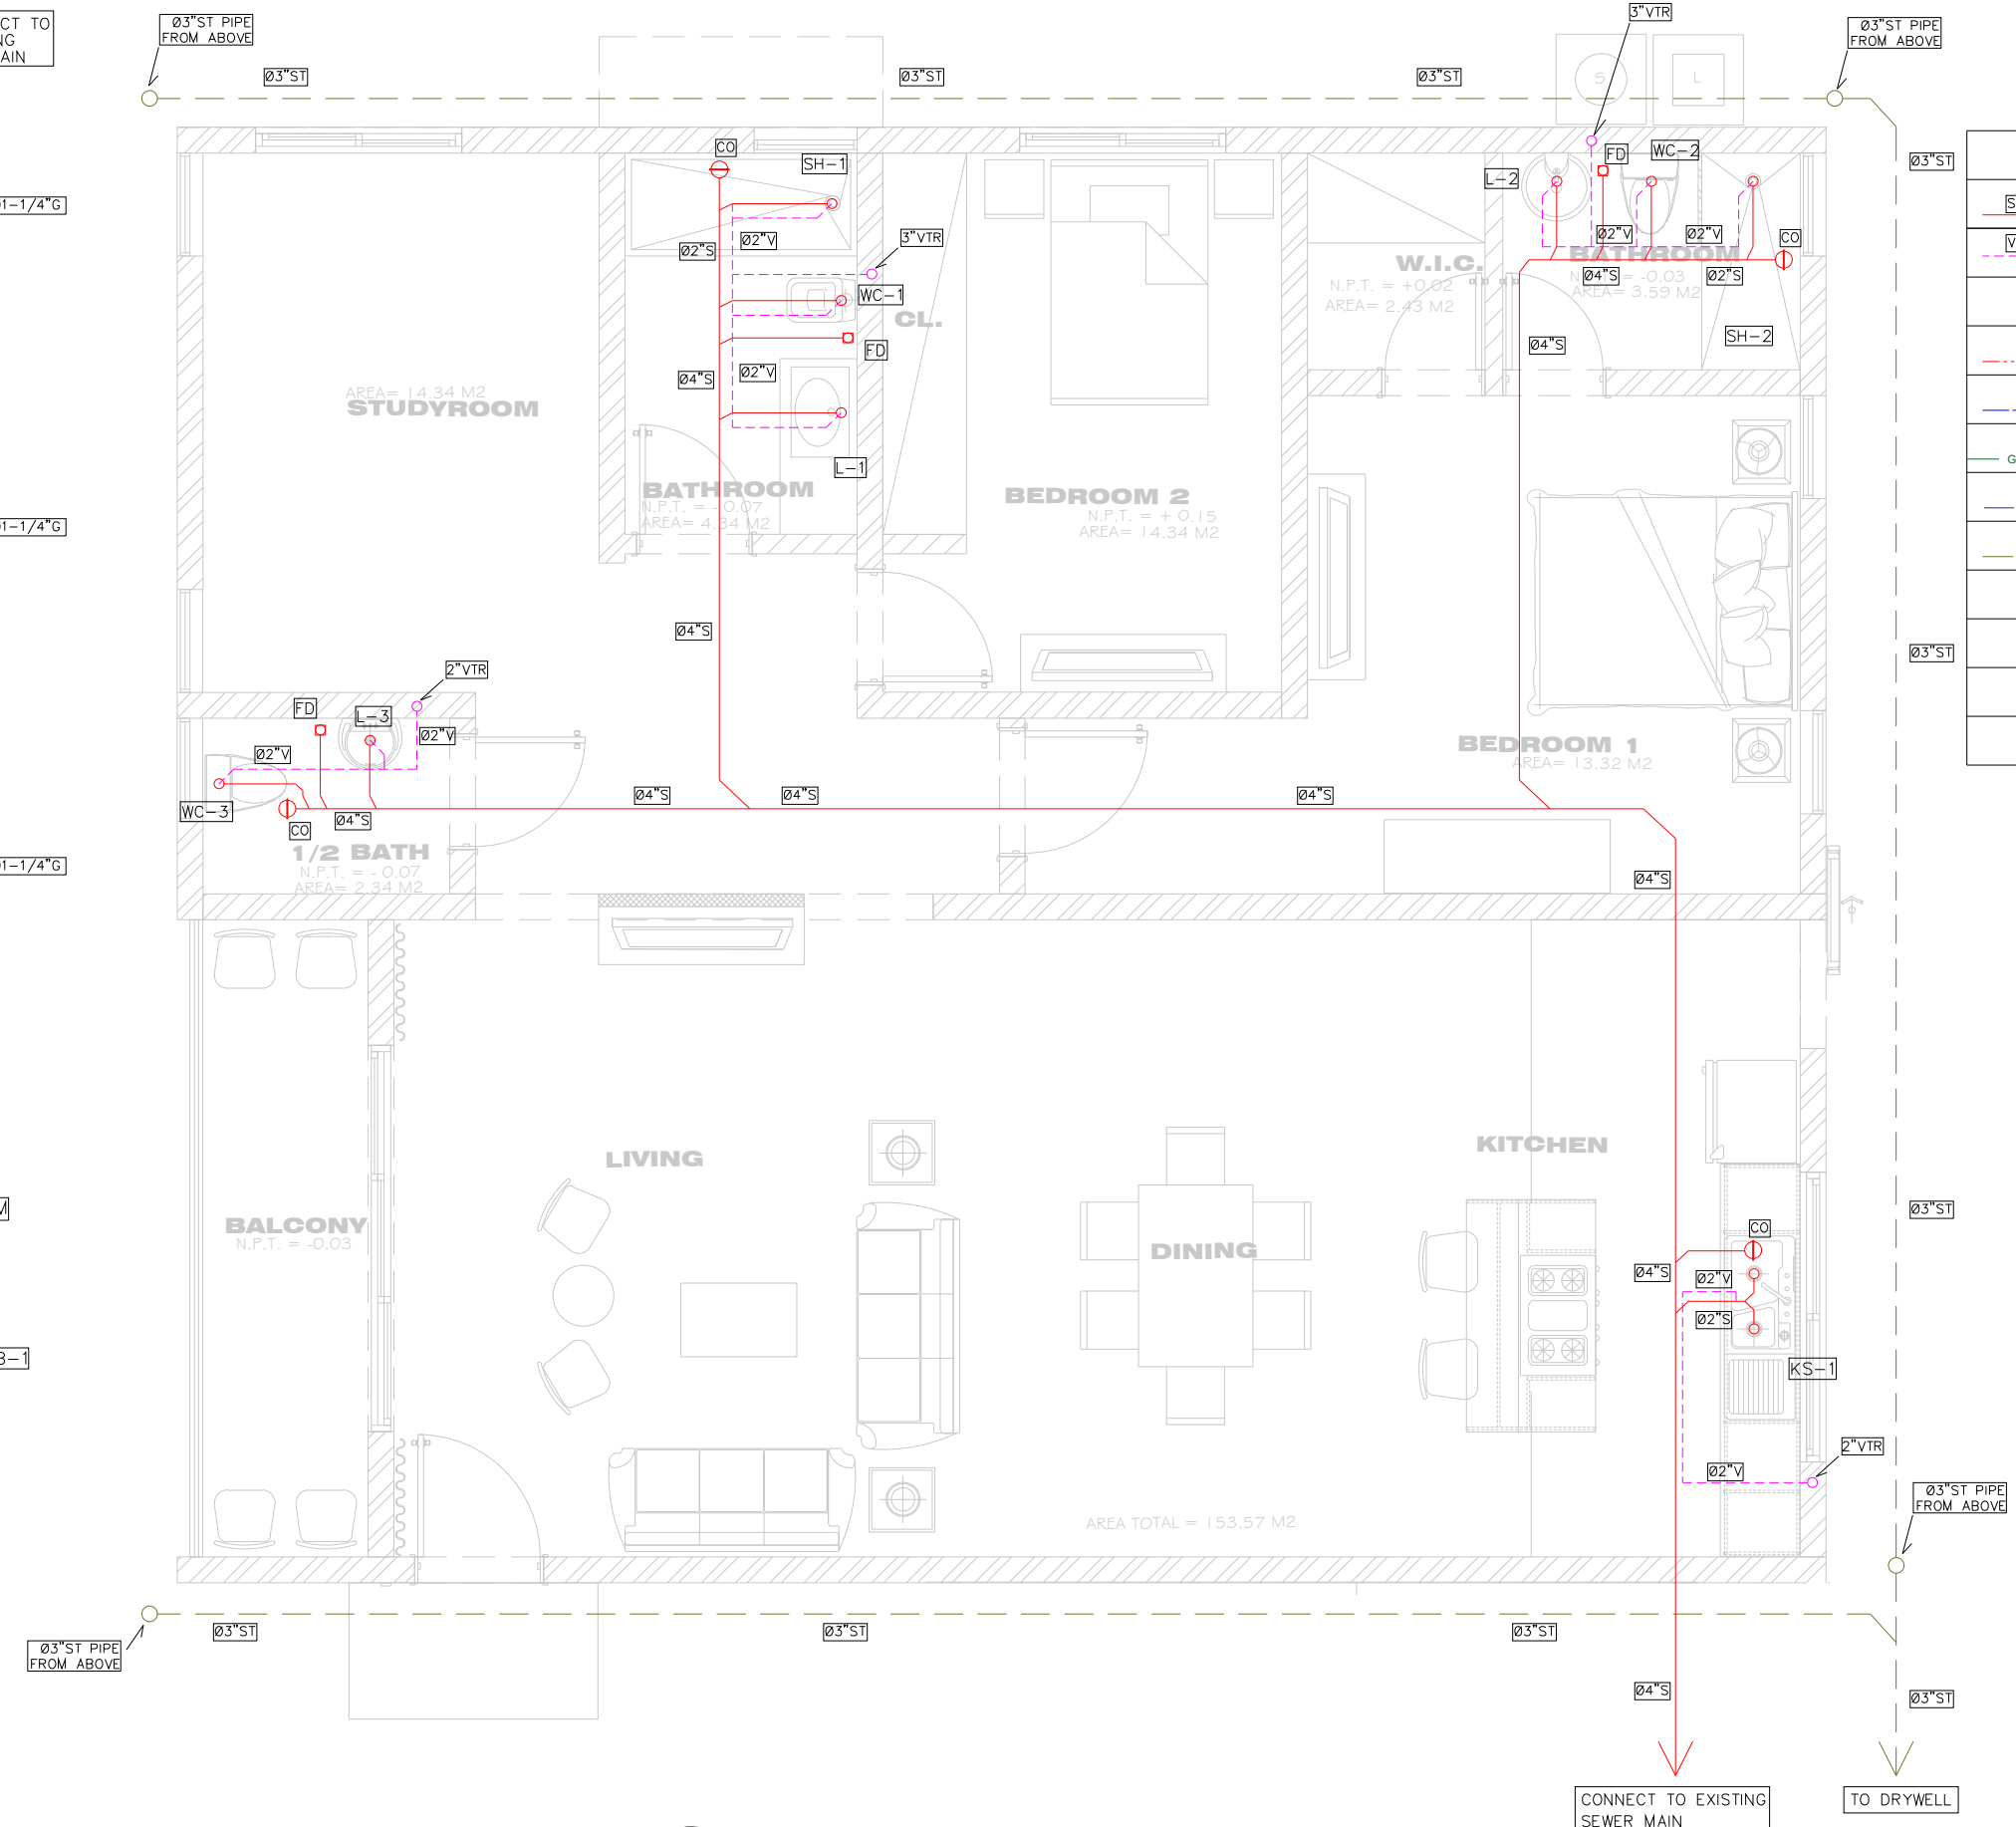









1 WATER & GAS SUPPLY FLOOR PLAN



2 SANITARY FLOOR PLAN

EQUIPMENT LEGENDS	
	SANITARY LINE
	VENT PIPING
	FLOOR DRAIN
	HOT WATER SUPPLY
	COLD WATER SUPPLY
	GAS LINE
	CONDENSATE PIPE
	STORM WATER
	CLEAN OUT
	WATER METER
	WATER SHUTOFF VALVE
	GAS SHUTOFF VALVE

PICTURE SCHEDULE						
ITEM	FIXTURE	COLD WATER	HOT WATER	WASTE	WASTE STORM DRAIN	DESCRIPTION
	WATER CLOSET	1/2"	-	3"	2"	= 1.28 GALLONS/FLUSH SELECTION TBD BY OWNER
	LAVATORY	1/2"	1/2"	2"	1-1/2"	= 2.2 GPM, FAUCET SELECTION TBD BY OWNER
	BATHTUB	1/2"	1/2"	2"	1-1/2"	= 1.8 GPM, SELECTION TBD BY OWNER
	SHOWER	1/2"	1/2"	2"	1-1/2"	= 1.8 GPM, SELECTION TBD BY OWNER
	KITCHEN SINK	1/2"	1/2"	2"	1-1/2"	= 1.8GPM@60 PSI, SELECTION TBD BY OWNER
	SINK	1/2"	1/2"	2"	1-1/2"	= 1.8GPM@60 PSI, SELECTION TBD BY OWNER
	HOSE BIBB	1/2"	-	-	-	ACORN NO 8120 WALL MOUNTED WITH ATMOSPHERIC VACUUM BREAKER